

## BPS-4510

### 1. Ordering Information

BPS-4510  
BPS: BeStar Piezo Siren



### 2. Technical Terms

Item	Unit	Specification
Rated Voltage(DC)	V	12
Operating Voltage(DC)	V	6...12
*Rated Current	mA	max.250
*Sound Output at 100cm	dB	min.90
*Resonant Frequency	K Hz	1.5~3.5
Shell Material/Color		ABS/Black
Tone Nature		SIREN
Operating Temperature	°C	-20...+60
Storage Temperature	°C	-30...+70
Weight	g	65

\*Value applying at rated voltage(DC).


This print and information therein are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content

DIS.		DATE		Page:1 of 3	BPS-4510
CHEC.		DATE			
APPR.		DATE		3rd angle projection	Alarm
 <b>BESTAR ELECTRONICS INDUSTRY CO.,LTD</b> TianAn Industry Park 4/F, Site B ChangZhou New District					DRG NO BS/TEA01.006A

This print and information therein are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content

BPS-4510

3. Drawing

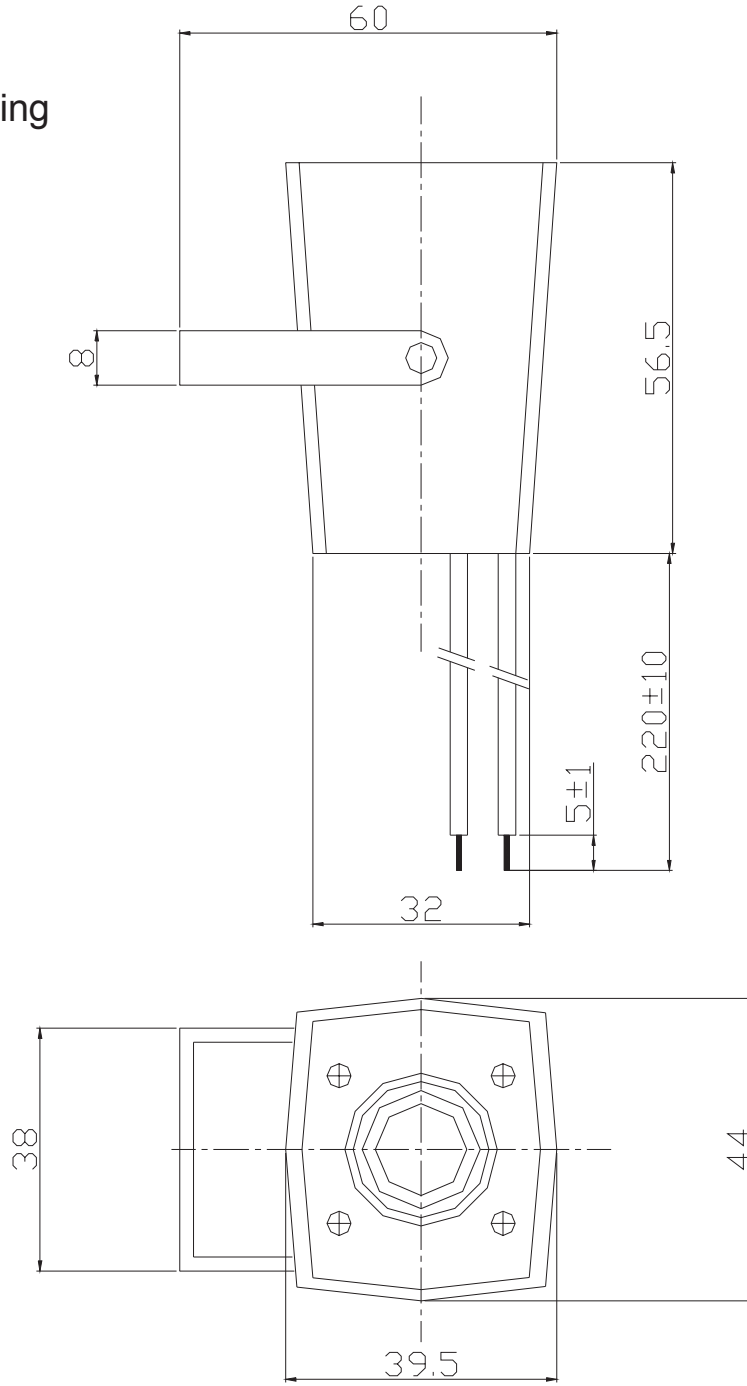

DIS.		DATE		Page:2 of 3 3rd angle projection	BPS-4510
CHEC.		DATE			Alarm
APPR.		DATE			DRG NO BS/TEA01.006A
 <b>BESTAR ELECTRONICS INDUSTRY CO.,LTD</b> TianAn Industry Park 4/F, Site B ChangZhou New District					